




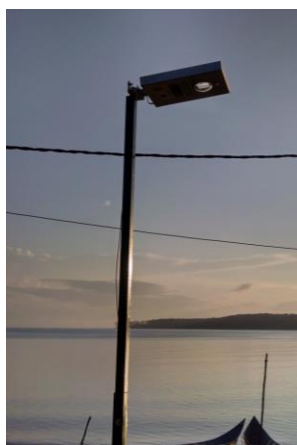
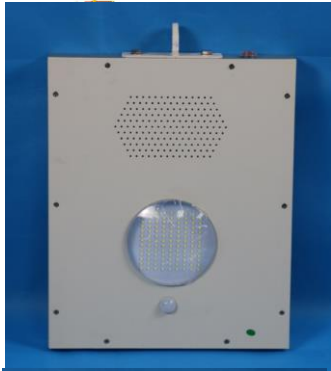
	integrated solar street light 5W(standard set)		Item NO.: JKC-M05
	Solar panel	Max power	18V10W (Imported High Efficiency Monocrystalline Silicon)
Life time		25 years	
	Battery	Type	Lithium Battery(12V4AH)
		Life time	4-5 years
	LED Lamp (with sensor)	Max power	12V5W
		led chip brand	Taiwan Epistar with high brightness
		lumen (LM)	625-675lm
		Life time	50000hours
	Charge time	by sun	6hours(Strong sunshine)
		Discharge time	full power
half power	>30hours		
	working Temperature	range(°C)	-30°C—+70°C
		range(k)	6000K-6500K(customized)
	mounting height	range (m)	2.5-3.5M
	space between light	range (m)	9-12M
	Lamps material of main	aluminium alloy	
	with remote control or not	no	
	Certificate	CE / ROHS / IP65	
	warranty period	3years	
	Packing & Weight	Product size	450*280*55MM
		Net weight(1 set)	4.5KG
		Gross weight(1 set)	5KG
		Packing size	470*380*140MM/470*380*55
		Qty/ctn	4sets/ctn
		Gross weight for each ctn(4 sets)	22KG
		Packing	neutral
	Packs Containers	20GP	1120sets
		40GP	2280sets
		40HC	2640sets




integrated solar street light 8W(standard set)		Item NO.: JKC-M08
Solar panel	Max power	18V 15W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25 years
Battery	Type	LithiumBattery(12V 7AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V8W
	led chip brand	Taiwan Epistar with high brightness
	lumen (LM)	1000-1080LM
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
temperature	range(k)	6000K-6500K(customized)
mounting height	range (m)	3-4M
space between	range (m)	10-14M
Lamps material of	aluminium alloy	
with remote control or not	no	
Certificate	CE / ROHS / IP65	
warranty period	3 years	
Packing & Weight	Product size	515*320*52MM
	Net weight(1 set)	5.5KG
	Gross weight(1 set)	6.5KG
	Packing size	470*380*140MM/470*380*55
	Qty/ctn	4sets/ctn
	Gross weight for each ctn(4 sets)	27KG
	Packing	neutral
Package	20GP	933sets

	Packs Containers	40GP	1900sets
		40'HP	2200sets



integrated solar street light 12W(standard set)		Item NO.: JKC-M12
Solar panel	Max power	18V 18W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25 years
Battery	Type	Lithium Battery(12V 9AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V12W
	led chip brand	Taiwan Epistar with high brightness
	lumen (LM)	1500-1625LM
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	3-4M
space between light	range (m)	10-14M
Lamps material of main	aluminium alloy	
with remote control or not	no	
Certificate	CE / ROHS / IP65	
warranty period	3years	
Packing & Weight	Product size	515*320*52MM
	Net weight(1 set)	6.5KG
	Gross weight(1 set)	7KG
	Packing size	540*400*140MM/540*400*570M
	Qty/ctn	4sets/ctn
	Gross weight for each ctn(4 sets)	29KG
	Packing	neutral
Packs Containers	20GP	933sets
	40GP	1900sets
	40HC	2200sets

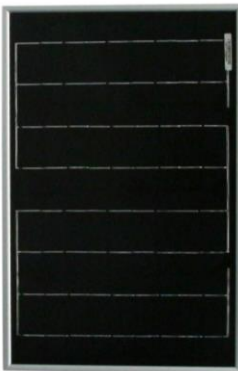

integrated solar street light 15W(standard set)		Item NO.: JKC-M15
Solar panel	Max power	18V 30W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25years
Battery	Type	Lithium Battery(12V 12AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V15W
	led chip brand	Taiwan Epistar with high brightness
	lumen (LM)	1875-2025LM
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	4-5M
space between light	range (m)	14-17M
Lamps material of main	aluminium alloy	
with remote control or not	no	
Certificate	CE / ROHS / IP65	
warranty period	3years	
Packing & Weight	Product size	670*325*140MM
	Net weight(1 set)	9KG
	Gross weight(1 set)	9.5KG
	Packing size	690*430*210MM/690*430*420
	Qty/ctn	3sets/ctn
	Gross weight for each ctn(4 sets)	30KG
	Packing	neutral
Packs Containers	20GP	699sets
	40GP	1425sets
	40HC	1650sets



integrated solar street light 20W(standard set)		Item NO.: JKC-M20
Solar panel	Max power	18V 45W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25years
Battery	Type	Lithium Battery(12V 21AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V20W
	led chip brand	Bridgelux from USA with high brightness
	lumen (LM)	2500-2700LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	4-6M
space between light	range (m)	14-20M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3 years	
Packing & Weight	Product size	880*330*140MM
	Net weight	14KG
	Gross weight	15KG
	Packing size	960*400*200MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	400sets
	40GP	814sets
	40HC	942sets



integrated solar street light 25W(standard set)		Item NO.: JKC-M25
Solar panel	Max power	18V 50W(Imported High Efficiency Monocrystalline)
	Life time	25years
Battery	Type	Lithium Battery(12V 24AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V25W
	led chip brand	Bridgelux from USA with high brightness
	lumen (LM)	3125-3375LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	5-6M
space between light	range (m)	17-20M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3years	
Packing & Weight	Product size	1130*330*140MM
	Net weight	17.5KG
	Gross weight	19KG
	Packing size	1200*400*200MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	280sets
	40GP	570sets
	40HC	660sets




integrated solar street light 30W(standard set)		Item NO.: JKC-M30
Solar panel	Max power	18V 50W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25years
Battery	Type	Lithium Battery(12V 27AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V30W
	led chip brand	Bridgelux from USA with high brightness
	lumen (LM)	3750-4050LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	6-7M
space between light	range (m)	20-24M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3years	
Packing & Weight	Product size	1130*330*140MM
	Net weight	18KG
	Gross weight	20KG
	Packing size	1200*400*200MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	280sets
	40GP	570sets
	40HC	660sets






integrated solar street light 40W(standard set)		Item NO.: JKC-M40
Solar panel	Max power	18V 60W(Imported High Efficiency Monocrystalline)
	Life time	25years
Battery	Type	LithiumBattery(12V 30AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V40W
	led chip brand	Bridgelux from USA with high brightness
	lumen (LM)	5000-5400LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	colour temperature	range(k)
mounting height	range (m)	7-8M
space between light	range (m)	23-27M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3 years	
Packing & Weight	Product size	1130*330*140MM
	Net weight	19KG
	Gross weight	21KG
	Packing size	1200*400*200MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	280sets
	40GP	570sets
	40HC	660sets



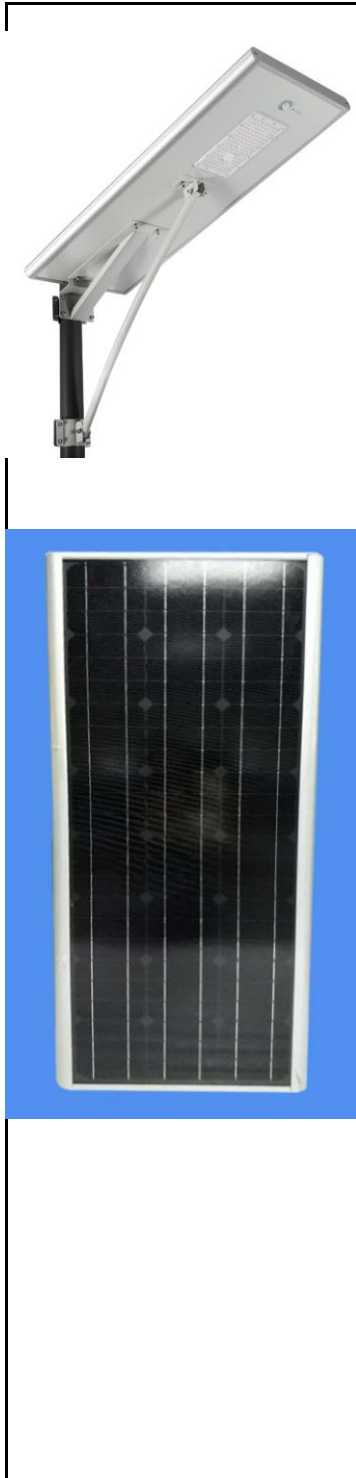


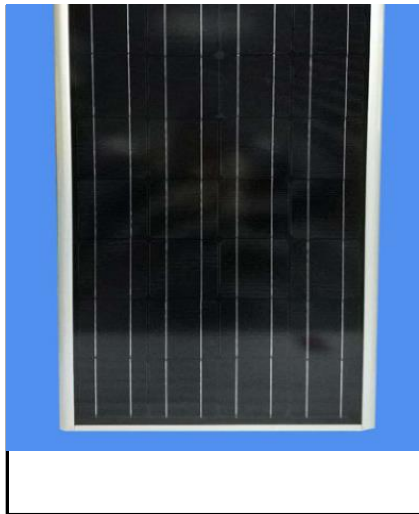
integrated solar street light 50W(standard set)		Item NO.: JKC-M50
Solar panel	Max power	18V 70W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25years
Battery	Type	Lithium Battery(12V 36AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V50W
	led chip brand	Bridgelux from USA with high brightness
	lumen (LM)	6250-6750LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	7-9M
space between light	range (m)	23-31M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3 years	
Packing & Weight	Product size	1130*458*140MM
	Net weight	21KG
	Gross weight	22KG
	Packing size	1200*540*200MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	233sets
	40GP	475sets
	40HC	550sets




integrated solar street light 60W(standard set)		Item NO.: JKC-M60
Solar panel	Max power	18V 80W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25years
Battery	Type	Lithium Battery(12V 42AH)
	Life time	4-5 years
LED Lamp (with sensor)	Max power	12V60W
	led chip brand	Bridgelux from USA with high brightness
	lumen (LM)	7500-8100LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	7-9M
space between light	range (m)	23-31M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3 years	
Packing & Weight	Product size	1130*458*140MM
	Net weight	22KG
	Gross weight	23KG
	Packing size	1200*540*200MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	233sets
	40GP	475sets
	40HC	550sets

  	integrated solar street light 70W(standard set)		Item NO.: JKC-M70
	Solar panel	Max power	18V 90W(Imported High Efficiency Monocrystalline Silicon)
		Life time	25years
	Battery	Type	LithiumBattery(12V 51AH)
		Life time	4-5 years
	LED Lamp (without sensor)	Max power	12V70W
		led chip brand	Bridgelux from USA with high brightness
		lumen (LM)	8750-9450LM
		Life time	100000hours
		Viewing Angle	120°
	Charge time	by sun	6hours(Strong sunshine)
	Discharge time	full power	>15hours
		half power	>30hours
	working Temperature	range(°C)	-30℃—+70℃
	colour temperature	range(k)	6000K-6500K(customized)
mounting height	range (m)	7-9M	
space between light	range (m)	23-31M	
Lamps material of main	aluminium alloy		
with remote control or not	yes		
Certificate	CE / ROHS / IP65		
warranty period	3 years		
Packing & Weight	Product size	1130*590*140MM	
	Net weight	25KG	
	Gross weight	27KG	
	Packing size	1200*680*200MM	
	Qty/ctn	1set/ctn	
	Packing	neutral	
Packs Containers	20GP	186sets	
	40GP	380sets	
	40HC	440sets	

	integrated solar street light 80W(standard set)		Item NO.: JKC-M80
Solar panel	Max power	18V 100W(Imported High Efficiency Monocrystalline Silicon)	
	Life time	25years	
Battery	Type	Lithium Battery(12V 57AH)	
	Life time	4-5 years	
LED Lamp (without sensor)	Max power	12V80W	
	led chip brand	Bridgelux from USA with high brightness	
	lumen (LM)	10000-10800LM	
	Life time	100000hours	
	Viewing Angle	120°	
Charge time	by sun	6hours(Strong sunshine)	
Discharge time	full power	>15hours	
	half power	>30hours	
working Temperature	range(°C)	-30℃—+70℃	
	range(k)	6000K-6500K(customized)	
mounting height	range (m)	7-10M	
space between light	range (m)	23-34M	
Lamps material of main	aluminium alloy		
with remote control or not	yes		
Certificate	CE / ROHS / IP65		
			
			



warranty period	3 years	
Packing & Weight	Product size	1130*590*140MM
	Net weight	26KG
	Gross weight	28KG
	Packing size	1200*680*200MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	186sets
	40GP	380sets
	40HC	440sets

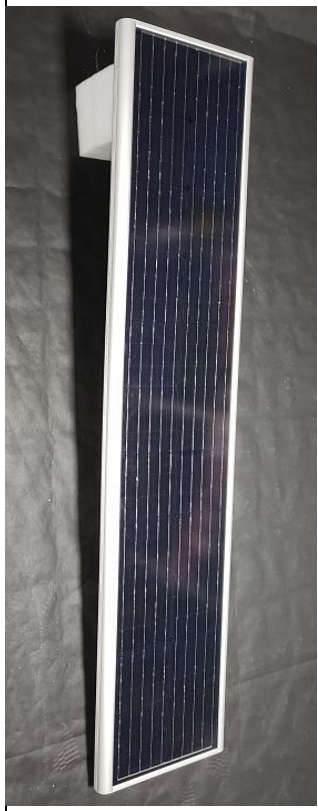

integrated solar street light 100W(standard set)		Item NO.: JKC-M100
Solar panel	Max power	18V 130W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25years
Battery	Type	Lithium Battery(12V 63AH)
	Life time	4-5 years
LED Lamp (without sensor)	Max power	12V100W
	led chip brand	Bridgelux from USA with high brightness
	lumen (LM)	12500-13500LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	7-10M
space between light	range (m)	23-34M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3 years	
Packing & Weight	Product size	1830*388*45MM
	Net weight	27KG
	Gross weight	34KG
	Packing size	1710*500*120MM/450*250*400MM
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	180sets
	40GP	360sets
	40HC	425sets



integrated solar street light 120W(standard set)		Item NO.: JKC-M120
Solar panel	Max power	18V 150W(Imported High Efficiency Monocrystalline Silicon)
	Life time	25years
Battery	Type	Lithium Battery(12V 78AH)
	Life time	4-5 years
LED Lamp (without sensor)	Max power	12V120W
	led chip brand	Brugerlux from USA with high brightness
	lumen (LM)	15000-16200LM
	Life time	100000hours
	Viewing Angle	120°
Charge time	by sun	6hours(Strong sunshine)
Discharge time	full power	>15hours
	half power	>30hours
working Temperature	range(°C)	-30°C—+70°C
	range(k)	6000K-6500K(customized)
mounting height	range (m)	7-12M
space between light	range (m)	23-41M
Lamps material of main	aluminium alloy	
with remote control or not	yes	
Certificate	CE / ROHS / IP65	
warranty period	3 years	
Packing & Weight	Product size	1650*580*45MM
	Net weight	30KG
	Gross weight	37KG
	Packing size	1700*620*120mm/450*250*400mm
	Qty/ctn	1set/ctn
	Packing	neutral
Packs Containers	20GP	160sets
	40GP	320sets
	40HC	377sets